


FEATURES

- * 5-channel MIC input and 3-channel Aux input.
- * With 1-channel EMC input.
- * Independent volume control, MASTER volume control.
- * With compulsive insert and Priority function.
- * MIC balance input interface with phantom power.
- * Individual Gain control for MIC.
- * EMC has priority over all inputs except MIC 2
- * Bass and Treble Tone Control.
- * AC 110V or 230V and DC 24V operation.

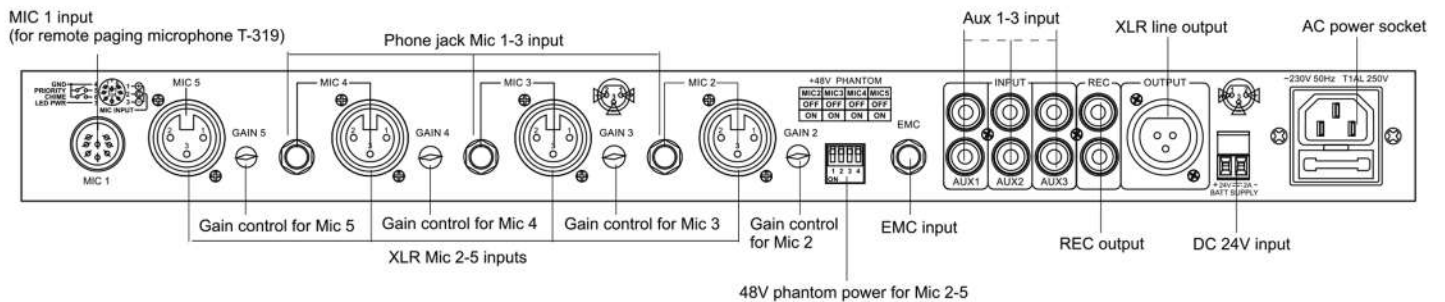

Input	MIC 1, 2, 3, 4, 5: 5mV/600Ω Balanced AUX 1, 2, 3: 10KΩ/200mV, Unbalanced
Output	600Ω/1V/0dBV
Frequency Response	20Hz~20KHz (±1dB)
S/N Ratio	MIC input: 80dB AUX input: 85dB
Tone	Bass: ±10dB at 100Hz Treble: ±10dB at 10KHz
Power Supply	~110V-230V 50/60Hz
Dimensions	484 x 298 x 44mm
Weight	4.22Kg